



# Sling Protector

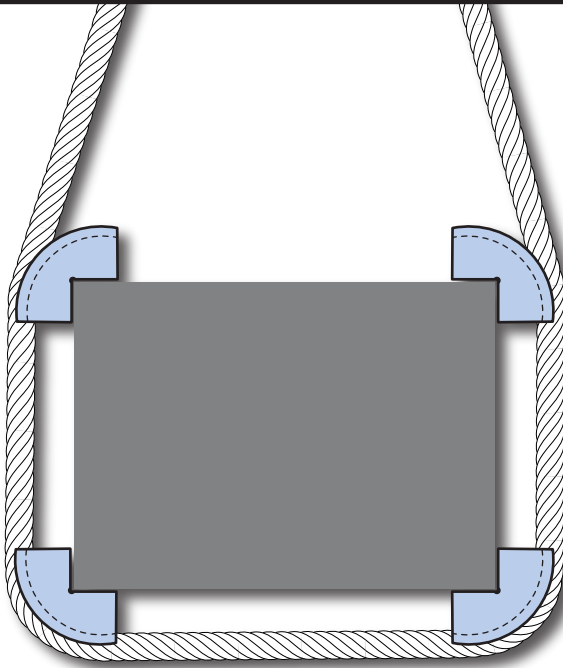

## Details:

- Made of solid nylon
  - Attaches with magnets
  - Works with:
    - Steel slings
    - Flat web slings
    - Roundslings
  - Available in 3 sizes:
    - 9" long (#9-3-90)
    - 12" long (#12-3-90)
    - 18" long (#18-3-90)
- Contact surface dia: 5"

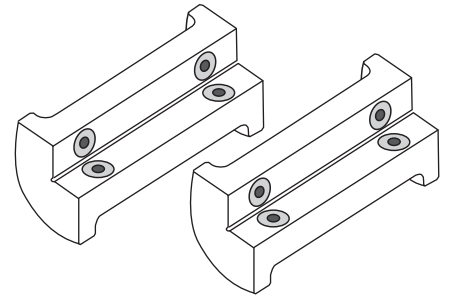


Made of solid nylon, these Magnetic Sling Protectors are only 1/7th the weight of steel, no tools are needed since magnets allow for quick and easy attachment and removal.

## Application Information

12,500 PSI MAX


Do not use above 220° or Below -20°

6,250 lbs per inch  
of web sling width

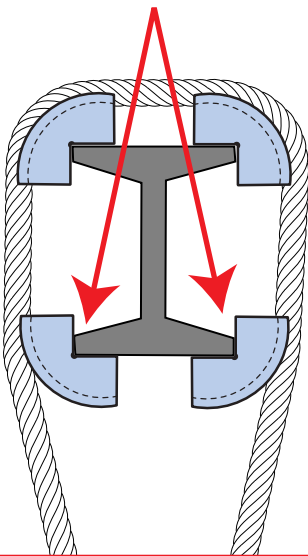


Not Full contact – only  
1/2 on one side

12,500 lbs per inch of  
web sling width



12,500 lbs per inch of  
web sling width

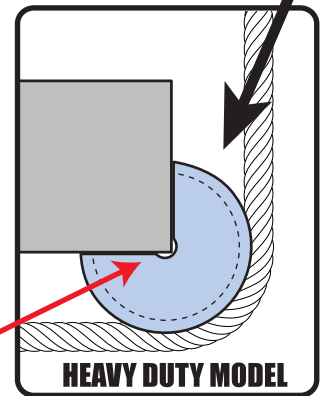

With FULL contact on inside surfaces

### Attention:

Note that 12,500 psi is the maximum compression strength of the material that these sling protectors are made from. Therefore, to have a safety margin, we recommend a safe working load limit (SWLL) of 12,500 lbs per inch of full contact sling width (as with a synthetic sling) on the outside of the sling protector. Additionally, you must also have full surface contact on the 90 degree surfaces on the inside of the sling protector to achieve this capacity or SWLL.